




Isuzu Power Solutions. For those who never stop.



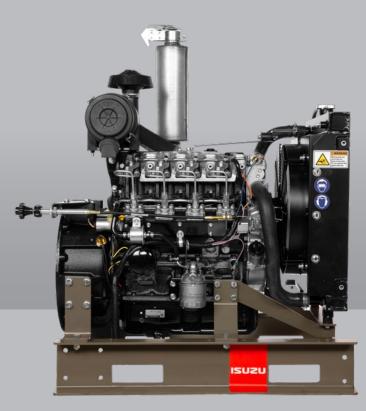

AT A GLANCE

Power Output	t ■ Max. 39.1 kW / 52.4 hp (rated) @ 3000 RPM ■ Max. 33.2 kW / 44.6 hp (cont.)	Dry Weight (engine only)	■ 165 kg			
	@ 3000 RPM	Features	Naturally aspirated diesel engine			
Torque Output	■ Max. 143 Nm @ 2250 RPM		 Mechanical direct injection fuel system Low noise, low fuel consumption, low maintenance 			
Displacement	■ 2.179 L		 Compact and easy to start Reliable power 			
Bore x Stroke	■ 85 x 96 mm		 Water cooled Tier-2 emission spec. reference 			
O/A Dimensions (engine only)	■ 753 mm (L) ■ 488 mm (W) ■ 602 mm (H)		Genuine Isuzu engine manufactured in Japan			

ENGINE PERFORMANCE

Engine Power RPM	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000
Rated (kW / hp)	15.0 / 20.1	18.0 / 24.1	22.0 / 29.5	26.0 / 34.9	30.0 / 40.2	33.7 / 45.2	35.0 / 46.9	36.0 / 48.3	37.0 / 49.6	39.1 / 52.4
Continuous (kW / hp)	12.8 / 17.1	15.3 / 20.5	18.7 / 25.1	22.1 / 29.6	25.5 / 34.2	28.6 / 38.4	29.8/39.9	30.6 / 41.0	31.5 / 42.2	33.2 / 44.6



SPECIFICATIONS

ENGINE

Туре:	Vertical water-cooled 4-cycle Diesel
Model (Manufacturer):	4LE2-PW10 (Isuzu)
Emission Spec. Reference:	Tier-2 / Stage-II
Max. Rated Output:	39.1 kW (52.4 hp) @ 3000 RPM
Continuous Output:	33.2 kW (44.6 hp) @ 3000 RPM
Max. Torque	143 Nm @ 2250 RPM
Displacement:	2.179 L
Combustion System:	Direct Injection (Naturally Aspirated)
O/A Dimensions:	753 (L) x 488 (W) x 602 mm (H)
Dry Weight:	165 kg (engine only)
Fuel Consumption:	11.0* L/h @ 100% load
*Based on diesel fuel with a specific g	ravity of 0.835 kg/m3 at 15°C. Actual value may vary.

POWER UNIT CONFIGURATIONS

1. Starter (STR)	 Light duty air cleaner system Industrial grade exhaust system Engine mounting feet Heavy duty full aluminium cooling system (max. 45°C) 12V complete electrical system (incl. engine harness and stop solenoid)
2. Economy (ECY)	Features include STR plus:
	• Medium duty air cleaner system (dual element)
	• Skid rail chassis mounting
	Mechanical vernier throttle kit
	• IP65 'ECO' engine controller
	(essential watchdog protection)
	• Engine RPM sender (MPU)
3. Premium (PRM)	Features include ECY plus:
	Air cleaner restriction indicator
	 Air cleaner rain/inlet hood
	 Residential grade exhaust system
	• High performance heavy duty cooling system (50°C +
	Engine oil pressure and temperature senders

- IP65 'PRO' engine controller (advanced watchdog protection + application I/O)
- Remote oil drain kit

KEY BENEFITS

DESIGN

Australian designed and sourced engine mounts and skid

Australian designed heavy duty bar and plate all aluminium radiator

Premium quality air cleaners

Complete electrical engine harness (includes engine stop solenoid, glow plug assisted start, fuel feed pump)

CONTROL PANEL

DeepSea 'ECO' economy engine controller (provides essential engine monitoring protection)

ComAp 'PRO' professional engine controller

(advanced engine monitoring protection, plus customer application inputs/outputs, complete event history log, large easy to read display)



Metal air cleaner system	Engine RPM regulation
Heat Exchanged cooling package	Pump pressure regulation
Premium pump pressure transducer range	Extension harnesses
Extension skid for mounting of auxiliary items	Electronic throttle actuator system
Flywheel stub shafts	Coolant surge tank kit
Auxiliary PTO crankshaft pulley	24V electrical system
4G remote monitoring and control kit	Energise to stop kit
Low coolant alarm protection kit	Vibration isolation mounts
160W solar battery charging kit	Pneumatic air starter motor kit



Heat Exchanger option



Clutch option



Transducer option

*Note, some options may not be available on all engine models. Some options are already standard fitment on some engine models. Our goods and services come with guarantees that cannot be excluded under the Australian Consumer Law. For major failures with the service, you are entitled. To cancel your service contract with us; and to a refund for the unused portion, or to compensation for its reduced value. You are also entitled to choose a refund or replacement for major failures with goods. If a failure with the goods or a service does not amount to a major failure, you are entitled to have the failure rectified in a reasonable time. If this is not done you are entitled to a refund for the goods and to cancel the contract for the service and obtain a refund of any nused portion. You are also entitled to be compensated for any other reasonable fores or damage from a failure in the goods or service. This warranty is given by Isuzu Australia Limited, ABN 97 006 962 572 (IAL') whose business address is 66 Foundation Road, Truganina, VIC 3029. IAL's telephone number is 1800 035 640. For further information on Isuzu warranties please visit www.powersolutions.isuzu.com.au. The information in this leaflet was correct at time of printing, but all measurements, specifications and equipment are subject to change without changes at any time without notice, no rices, colours, materials, equipment and models. IAL Many make changes at any time without notice, in prices, colours, materials, equipment and models. The information in this leaflet is general in nature. Your Isuzu dealer can confirm all measurements, specifications and enginemation in this leaflet is general in nature. Your lucu dealer can confirm all measurements, specifications and engine/equipment availability upon request. ARK003 06/21